



U.S. NUCLEAR WASTE TECHNICAL REVIEW BOARD

DEPARTMENT OF ENERGY-MANAGED SPENT NUCLEAR FUEL AT THE HANFORD SITE

OVERVIEW

The U.S. Department of Energy (DOE) manages approximately 2,500 metric tons of heavy metal (MTHM)¹ of spent nuclear fuel (SNF) that resulted mostly (85% by mass) from defense-related nuclear activities (primarily, weapons plutonium production reactors and naval propulsion reactors). Nearly all the SNF is stored at four locations: the Hanford Site in Washington State, the Idaho National Laboratory in Idaho, the Savannah River Site in South Carolina, and the Fort St. Vrain Independent Spent Fuel Storage Installation in Colorado (see the Board's fact sheet on [DOE-Managed Spent Nuclear Fuel](#)).² Approximately 2,130 MTHM of SNF are in dry storage at the Hanford Site, a 586-square mile area in southeastern Washington State (Figure 1). Most of the SNF at Hanford was generated from the operation of nine defense-related plutonium production reactors located along the Columbia River (in the site area known as the 100 Area). The reactors began operating in 1944, when the B Reactor was commissioned, and ended in 1987, when the N Reactor was permanently shut down. Other SNF at Hanford was generated from the operation of the Fast Flux Test Facility³ at Hanford and from commercial nuclear power reactors and research reactors.



Figure 1. Hanford Site (EPA 2017).

Note: ERDF = Environmental Restoration Disposal Facility

FFTF = Fast Flux Test Facility

SPENT NUCLEAR FUEL AND STORAGE FACILITIES AT HANFORD

Spent Nuclear Fuel. More than 95 percent of the SNF at Hanford by mass (~2,096 MTHM)

¹ Metric ton of heavy metal is a commonly used measure of the mass of nuclear fuel. Heavy metal refers to elements with an atomic number greater than 89 (*e.g.*, thorium, uranium, and plutonium) in the fuel. The masses of other constituents of the fuel, such as cladding, alloy materials, and structural materials (and fission products in spent nuclear fuel), are not included in this measure. A metric ton is 1,000 kilograms, which is equal to about 2,200 pounds.

² Fact sheets providing summary information on DOE-managed SNF stored at the Savannah River Site, Idaho National Laboratory, and Fort St. Vrain can be found at the Board website: <http://www.nwtrb.gov/our-work/fact-sheets>. A more detailed description of DOE-managed SNF and SNF storage facilities is provided in the Board report, *Management and Disposal of U.S. Department of Energy Spent Nuclear Fuel* (NWTRB 2017).

³ The Fast Flux Test Facility reactor was a liquid-sodium-cooled DOE test and research reactor.

Table 1. Spent Nuclear Fuel and Storage Facilities at the Hanford Site (NWTRB 2017)

Storage Facility	Main source of SNF	SNF Mass (MTHM)*	SNF Description (fuel type, cladding type)
Canister Storage Building	Hanford N Reactor	~2,096	Uranium metal fuel with zirconium-based† cladding
	Other Hanford plutonium production reactors	~5	Uranium metal fuel with aluminum cladding
	Shippingport Atomic Power Station: pressurized water reactor Core 2 blanket	~16	Uranium dioxide fuel with zirconium-based cladding
200 Area Interim Storage Area	Fast Flux Test Facility	~10	Uranium-plutonium oxide fuel (20 to 30% plutonium) with stainless steel cladding
	Commercial nuclear power reactors	~2	Uranium dioxide fuel with zirconium-based cladding
	Los Alamos Plutonium Reactor Experiment	<1	Steel-clad metallic plutonium alloy with iron, cobalt, or cesium
	TRIGA®‡ spent nuclear fuel assemblies	<1	Uranium zirconium hydride (with 8.0 to 8.5% uranium) with aluminum or stainless steel cladding

*Mass rounded to nearest metric ton
†Zirconium-based cladding includes zirconium cladding and Zircaloy™ cladding. Zircaloy is a trademarked name that refers to any of several alloys of zirconium with tin or other metals.
‡TRIGA is a type of test and research reactor provided by General Atomics

is fuel from the Hanford N Reactor, a DOE plutonium production reactor that also was used to produce electric power. Of the remaining 34 MTHM of SNF, ~18 MTHM are from commercial nuclear power reactors, ~10 MTHM are from the Fast Flux Test Facility, and ~5 MTHM are from other Hanford plutonium production reactors. The balance of the SNF includes small quantities of SNF from test and research reactors. Table 1 provides a summary of information on the predominant SNF types stored at Hanford, including the source, fuel type, cladding type, amount, and the corresponding storage facility.

N Reactor SNF is uranium metal fuel with zirconium alloy cladding. As shown in Figure 2, N Reactor SNF elements include two concentric annular tubes with lengths that range from 15 to 26 in (38 to 66 cm) and an outside diameter of 2.5 in (6.4 cm). All N Reactor SNF has been vacuum-dried and sealed in packages called Multi-Canister Overpacks (MCOs) (Figure 3). MCOs are 25.3 in (64.3 cm) in diameter and 160 in (406 cm) in height, have a welded closure lid, and can accommodate 270 N Reactor SNF elements. MCOs are designed for storage, transportation, and disposal of SNF.



Figure 2. N Reactor Fuel (NRC 2003).

The SNF from the other Hanford production reactors all have metallic fuel similar to N Reactor SNF, but has aluminum cladding (DOE 1993). All the SNF from the other reactors is contained in one MCO.

The MCOs are stored in the Canister Storage Building (Figure 4a) at the




Figure 3. Multi-Canister Overpack (McCormack 2014a).

Hanford Site and will need to be placed into Nuclear Regulatory Commission-certified transportation casks for transportation offsite (Lorenz 1997).

Also stored at the Canister Storage Building are 18 Shippingport spent fuel canisters that contain Shippingport Core 2 Blanket SNF (Hartlieb 2002). This SNF is from a pressurized water reactor and has natural uranium dioxide fuel with zirconium cladding. The Shippingport SNF canisters are welded stainless steel canisters with the same dimensions as the MCOs described above.

The ~10 MTHM of SNF from the Fast Flux Test Facility is stored in 49 stainless steel/nickel-alloy cylindrical containers, known as Core Component Containers, that have been placed inside shielded concrete overpacks called Interim Storage Casks. Most of the Fast Flux Test Facility SNF has a mixed uranium-plutonium oxide fuel matrix (with 20–30 percent plutonium) and stainless steel cladding (Carrell 2002). The Interim Storage Casks are located on a concrete pad called the Hanford 200 Area Interim Storage Area.

DOE also stores ~2 MTHM of SNF from other commercial and test reactors, as well as research reactors, that is packaged in shielded dry storage casks. Most of this SNF comes from commercial reactors and is uranium dioxide fuel with zirconium-alloy cladding. This SNF is stored at the 200 Area Interim Storage Area. Additional details on the SNF stored at Hanford are provided in NWTRB (2017).

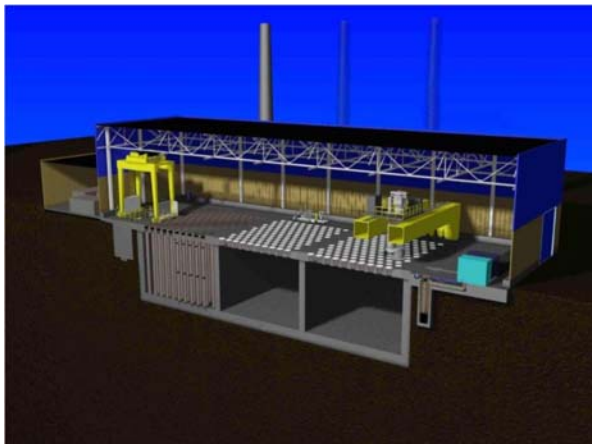

(a)



(b)

Figure 4. Hanford Spent Nuclear Fuel Storage Facilities. (a) Canister Storage Building; (b) Interim Storage Cask Being Placed on a Concrete Pad at the 200 Area Interim Storage Area (McCormack 2014b).

Canister Storage Building. The Canister Storage Building at Hanford is a 42,000-sq ft (3,900-sq m), rectangular, enclosed steel-framed structure (Figure 4a) with a reinforced concrete floor at grade level that covers a ~42-ft (12.8-m) deep, reinforced-concrete vault. The floor has 220 circular penetrations large enough to accommodate standard storage tubes and shield plugs. Each storage tube can hold a stack of two multi-purpose canisters (MCOs or Shippingport spent fuel canisters). The Canister Storage Building, which began operations in 2000, can store 440 storage multi-purpose canisters, but as of 2017 contains only 412 (394 MCOs and 18 Shippingport SNF canisters). No additional storage canisters are expected to be loaded into the Canister Storage Building (DeLeon 2011). The heat generated by the SNF is removed from the concrete vault by natural air convection.

200 Area Interim Storage Area. The 200 Area Interim Storage Area is a 200,000-sq ft (18,600-sq m), at-grade facility located west of the Canister Storage Building. The facility consists of a boundary fence with gates, perimeter lighting, three concrete pads, and gravel pads on which a variety of aboveground dry storage cask systems can be placed (Figure 4b). DOE began operations at the 200 Area Interim Storage Area in 2002, and has transferred SNF to the facility from other Hanford site locations (*e.g.*, the 300 Area and 400 Area—see Figure 1). As indicated previously, DOE stores SNF from the Fast Flux Test Facility, from commercial plants, and from various research and test reactors at the 200 Area Interim Storage Area.

PATH FORWARD FOR MANAGING AND DISPOSING OF HANFORD SPENT NUCLEAR FUEL

As part of a legal agreement between DOE, the State of Washington, and the Environmental Protection Agency (the Tri-Party Agreement⁴), DOE initially developed a high-level description of the disposition path for Hanford SNF (DOE 2012). DOE later provided details on this disposition path (DeLeon 2011; McCormack 2010; 2013). The SNF stored in the Canister Storage Building in MCOs and Shippingport spent fuel canisters will be transported to a planned Hanford shipping facility, the canisters will be placed in transportation casks, and the casks will be transported to a geologic repository (DOE 2012). The SNF at the 200 Area Interim Storage Area will be repackaged into DOE standard canisters at a planned hot cell facility. The DOE standard canisters will be transported to the planned shipping facility, the canisters will be placed in transportation casks, and the casks will be transported to a geologic repository (DOE 2012).

Given the uncertainty on when a geologic repository would become operational, it is likely the SNF stored at Hanford will remain onsite for decades. DOE's interim storage baseline study concluded that its current technology is sufficient for the first 40 years of SNF storage (McCormack 2010). However, the study also indicated that DOE needs supplemental technology for extended interim storage of SNF (*e.g.*, for predicting serviceable lifetime of packaging and facility components) and final disposal (*e.g.*, remote welding of standardized canisters) (McCormack 2010). The technology that will be needed in the future depends on the timing of and requirements for final disposal.

⁴ The Tri-Party Agreement, known formally as the Hanford Federal Facility Agreement and Consent Order, is a legal document that requires DOE to perform certain actions to comply with the Resource Conservation and Recovery Act, the Comprehensive Environmental Response, Compensation and Liability Act, and the State of Washington's Hazardous Waste Management Act.

NWTRB (2017) provides a more detailed discussion of the path forward for managing and disposing of Hanford SNF.

REFERENCES

Carrell, R. 2002. *Annex D – 200 Area Interim Storage Area Final Safety Analysis Report*. HNF-3553, Revision 2. Richland, WA: Fluor Hanford. March.

DeLeon, G. 2011. “Overview of DOE Spent Nuclear Fuel Management and Disposition Options.” Presentation at the 25th International Atomic Energy Agency Contact Expert Group Plenary Meeting, October 7, 2011, Stockholm, Sweden.

DOE (Department of Energy). 1993. *Spent Fuel Working Group Report on Inventory and Storage of the Department’s Spent Nuclear Fuel and Other Reactor Irradiated Nuclear Materials and Their Environmental, Safety and Health Vulnerabilities*. Vol. 1. DOE/EH-94010351. November.

DOE. 2012. *2013 Hanford Lifecycle Scope, Schedule and Cost Report*. DOE/RL-2012-13, Revision 0. Richland, WA: U.S. Department of Energy, Richland Operations Office. December.

EPA (Environmental Protection Agency). 2017. “Hanford – Washington.” Accessed October 2, 2017.
<https://yosemite.epa.gov/r10/cleanup.nsf/sites/hanford>.

Hartlieb, W.G. 2002. *Spent Nuclear Fuel Project Canister Storage Building Final Safety Analysis Report*. HNF-3553, Annex A, Revision 2. Richland, WA: Fluor Hanford. September.

Lorenz, B.D. 1997. *Multicanister Overpack Topical Report*. HNF-SD-SNF-SARR-005, Revision 0. Richland, WA: Fluor Hanford. March.

McCormack, R.L. 2010. “Hanford Spent Nuclear Fuel Overview.” Presentation to the National Spent Nuclear Fuel Program Meeting, March 24, 2010.

McCormack, R.L. 2013. “Hanford Irradiated Nuclear Fuel Disposition Overview.” Presentation to DOE and SKB International Meeting on SNF management, September 4, 2013.

McCormack, R.L. 2014a. “Multi-Canister Overpack.” Presentation to the Nuclear Waste Technical Review Board, August 6, 2014, Idaho Falls, ID.

McCormack, R.L. 2014b. “Hanford Spent Nuclear Fuel Facility Aging.” Presentation to the Nuclear Waste Technical Review Board, August 6, 2014, Idaho Falls, ID.

NRC (National Research Council). 2003. *Improving the Scientific Basis for Managing DOE’s Excess Nuclear Materials and Spent Nuclear Fuel*. Washington, D.C.: The National Academies Press.

NWTRB (Nuclear Waste Technical Review Board). 2017. *Management and Disposal of U.S. Department of Energy Spent Nuclear Fuel*. Arlington, VA: U.S. Nuclear Waste Technical Review Board. December.

The U.S. Nuclear Waste Technical Review Board

is an independent federal agency established in the 1987 amendments to the Nuclear Waste Policy Act (NWPA).

The Board evaluates the technical and scientific validity of U.S. Department of Energy activities related to implementing the NWPA and provides objective expert advice on nuclear waste issues to Congress and the Secretary of Energy.

The eleven Board members are nominated by the National Academy of Sciences and are appointed by the President.