



# U.S. NUCLEAR WASTE TECHNICAL REVIEW BOARD

## DEPARTMENT OF ENERGY-MANAGED SPENT NUCLEAR FUEL AT THE IDAHO NATIONAL LABORATORY

### OVERVIEW

The U.S. Department of Energy (DOE) manages approximately 2,500 metric tons of heavy metal (MTHM)<sup>1</sup> of spent nuclear fuel (SNF) that resulted mostly (85% by mass) from defense-related nuclear activities (primarily weapons plutonium production reactors and naval propulsion reactors). Nearly all the SNF is stored at four locations: the Hanford Site in Washington State, the Idaho National Laboratory (INL) in Idaho, the Savannah River Site (SRS) in South Carolina, and the Fort St. Vrain Independent Spent Fuel Storage Installation in Colorado (see the Board’s fact sheet on [DOE-Managed Spent Nuclear Fuel](#)).<sup>2</sup> Approximately 325 MTHM of SNF are stored at INL (Figure 1). The SNF inventory at INL comprises a broad range of fuels that were used during commercial, research, test, and naval reactor operations. The diversity of fuel types at INL leads to a wide variety of storage configurations. This diversity also dictates that a variety of treatment processes and packaging steps is and will continue to be needed to prepare the SNF for offsite transport and disposal.

### SPENT NUCLEAR FUEL AND STORAGE FACILITIES AT INL

**Spent Nuclear Fuel.** The SNF inventory at INL includes more than 250 types of SNF (Hill and Fillmore 2005). Table 1 lists the INL storage facilities, the type of storage (wet or dry), and summarizes the distinguishing

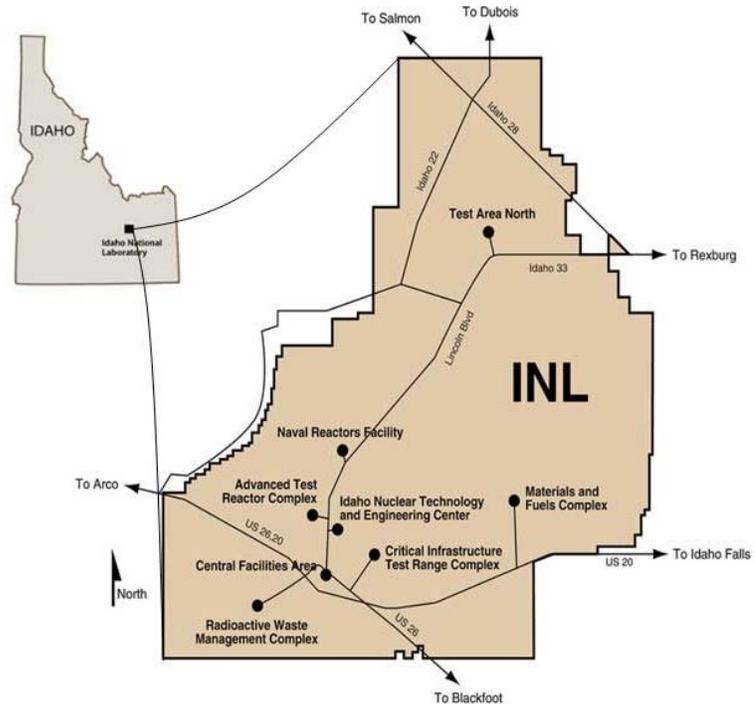


Figure 1. Idaho National Laboratory (adapted from INL 2017).

<sup>1</sup> Metric ton of heavy metal is a commonly used measure of the mass of nuclear fuel. Heavy metal refers to elements with an atomic number greater than 89 (e.g., thorium, uranium, and plutonium) in the fuel. The masses of other constituents of the fuel, such as cladding, alloy materials, and structural materials (and fission products in spent nuclear fuel), are not included in this measure. A metric ton is 1,000 kilograms, which is equal to about 2,200 pounds.

<sup>2</sup> Fact sheets providing summary information on DOE-managed SNF stored at the Hanford Site, Savannah River Site, and Fort St. Vrain can be found at the Board website: <http://www.nwtrb.gov/our-work/fact-sheets>. A more detailed description of DOE-managed SNF and SNF storage facilities is provided in the Board report, *Management and Disposal of U.S. Department of Energy Spent Nuclear Fuel* (NWTRB 2017).

**Table 1. Spent Nuclear Fuel and Storage Facilities at the Idaho National Laboratory**

Storage Facility*	Storage Type	Main Source of SNF	SNF Mass§ (MTHM)	SNF Characteristics (fuel type and cladding type)
INTEC CPP-1774	Dry	Core debris from Three Mile Island Unit 2 reactor accident	81.6	Uranium dioxide fuel with melted zirconium alloy cladding (core debris)
INTEC CPP-749	Dry	Shippingport Atomic Power Station; light water breeder reactor core	42.6	Thorium-uranium dioxide fuel with zirconium alloy or stainless steel cladding
	Dry	Fermi-1 fast breeder reactor blanket assemblies	34.2	Uranium-molybdenum alloy fuel with sodium bonding between the fuel and the stainless steel cladding
	Dry	Peach Bottom Unit 1, Core 1	1.6	Thorium-uranium carbide fuel in a graphite matrix
INTEC CPP-2707	Dry	Commercial nuclear power reactors	64.7	Uranium dioxide fuel with zirconium alloy or stainless steel cladding
	Dry	14 fuel types from experiments at the Loss of Fluid Test facility	3.7	Various
INTEC CPP-666	Wet	Advanced Test Reactor fuel discharged after fiscal year 2005	1.6	Uranium aluminide fuel with aluminum cladding
	Dry	21 fuel types transferred from the CPP-666 pool, including all Advanced Test Reactor fuel discharged prior to fiscal year 2006	6.7	Various
	Wet	Naval pressurized water reactors	~14.0‡	Metal fuel†
MFC Radioactive Scrap and Waste Facility	Dry	Experimental Breeder Reactor-II blanket assemblies	19.2	Low-enrichment uranium metal fuel with sodium bonding between the fuel and the stainless steel cladding
	Dry	Experimental Breeder Reactor-II driver assemblies	2.3	High-enrichment uranium-molybdenum alloy fuel with sodium bonding between the fuel and the stainless steel cladding
NRF Overpack Storage Building	Dry	Naval pressurized water reactors	~14.0‡	Metal fuel†
NRF Expended Core Facility	Wet	Naval pressurized water reactors	– ‡	Metal fuel†
INTEC CPP-603	Dry	Fort St. Vrain commercial nuclear power reactor	8.6	Thorium-uranium carbide fuel in a graphite matrix
	Dry	20 fuel types from domestic and foreign research reactors	3.3	Various
MFC Hot Fuel Examination Facility	Dry	Hanford Fast Flux Test Facility fuel assemblies	<0.1	Uranium-zirconium alloy fuel with sodium bonding between the fuel and the stainless steel cladding

**Notes**

\*Abbreviations for storage facilities are as follows: INTEC is Idaho Nuclear Technology and Engineering Center; CPP is Chemical Processing Plant; MFC is Materials and Fuels Complex; and NRF is Naval Reactors Facility.

§Mass in metric tons of heavy metal. The listed INL inventory is from the Board’s report (NWTRB 2017) and is as of January 2013, except for the naval SNF, which was 28 MTHM as of August 2014.


‡The quantities of naval SNF stored at CPP-666 and NRF are estimates. A dash indicates a variable but small quantity.

†Details of the fuel and cladding design for naval SNF are not publicly available.

characteristics of the majority of the stored SNF. Because of the large number of SNF types stored at some of the facilities, only the most prevalent types by mass are described in Table 1.

About seventy percent of the inventory by mass is SNF from commercial nuclear power reactors [including damaged fuel (core debris) from the Three Mile Island Unit 2 (TMI-2) reactor], about seventeen percent is a type of SNF called sodium-bonded SNF, and about nine percent is SNF from naval reactors. Many different SNF types make up the remaining four percent of the inventory. Within the inventory of commercial SNF at INL, TMI-2 core debris makes up the largest portion. A description of commercial SNF from pressurized water reactors and boiling water reactors can be found in the Board's fact sheet on [Commercial Spent Nuclear Fuel](#). A description of SNF from the former gas-cooled commercial nuclear power reactor at Fort St. Vrain can be found in the Board's fact sheet on [DOE-Managed Spent Nuclear Fuel at Fort St. Vrain](#). After commercial SNF, sodium-bonded SNF comprises the next largest inventory. TMI-2 core debris and sodium-bonded SNF are described in more detail below.

TMI-2 Core Debris. Core debris from the TMI-2 reactor accident includes approximately 82 MTHM of the “remains” of 177 pressurized water reactor fuel assemblies and other structural and control materials comprising the reactor core (NRC 1999). Figure 2 is a photograph of a piece of the core debris. At the TMI-2 site, DOE loaded the core debris into 344 stainless steel canisters, called TMI-2 canisters, and shipped them to INL. When loaded, the average radioactivity of the material in each canister was approximately 20,000 curies and the average heat production was approximately 60 watts (INL 2012). At INL, DOE packaged the TMI-2 canisters into 29 carbon-steel dry storage canisters, which then were loaded into 29 concrete horizontal storage modules.

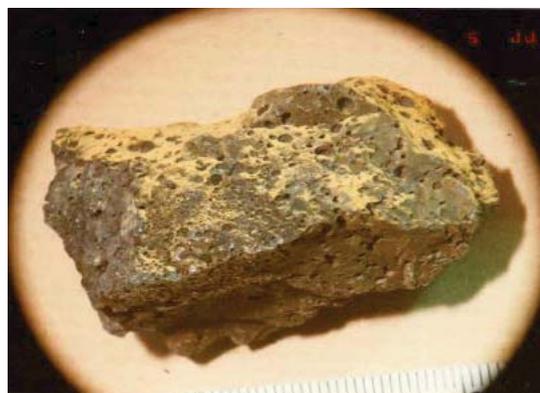

**Figure 2. Three Mile Island Unit 2 Core Debris (Carmack and Braase 2015)**

Sodium-bonded SNF. The sodium-bonded SNF at INL came from three reactors that are all decommissioned: the Fermi-1 breeder reactor in Michigan; the Experimental Breeder Reactor-II at INL; and the Fast Flux Test Facility at the Hanford Site in Washington State (DOE 2006). These reactors used sodium as a liquid coolant and some of the fuel used in the reactors was fabricated with sodium between the fuel and the cladding. The Fermi-1 and the Experimental Breeder Reactor-II reactors used two types of fuel assemblies: driver fuel assemblies that sustained the nuclear reaction in the core and the surrounding blanket fuel assemblies that captured neutrons to produce plutonium. The storage locations and quantities of driver and blanket fuel assemblies stored at INL are provided in Table 1.

Sodium is highly chemically reactive, producing hydrogen gas and sodium hydroxide when in contact with water. Figure 3 depicts fuel cladding of sodium-bonded fuel that ruptured during a reaction of sodium with water vapor that leaked into the fuel.


Since 1996, DOE has chemically treated about 4.5 MTHM of sodium-bonded SNF. The chemical treatment process dissolves the fuel using molten salt. DOE's treatment process

produces two high-level radioactive waste streams that are intended to be compatible with geologic disposal. One waste stream is metallic and the other will be converted to a ceramic waste form.

Additional details about sodium-bonded SNF and its treatment are provided in the Board’s report, *Management and Disposal of U.S. Department of Energy Spent Nuclear Fuel* (NWTRB 2017).

### Spent Nuclear Fuel Storage Facilities.

DOE stores SNF at INL in nine facilities at three locations on the INL site: the Idaho Nuclear Technology and Engineering Center, the Naval Reactors Facility, and the Materials and Fuels Complex (see Figure 1 and Table 1). The SNF storage facilities include a variety of storage configurations, including wet pool storage, indoor dry vaults, outdoor below-grade vaults, and SNF cask storage on concrete pads. Five of the nine storage facilities are more than 40 years old. Since the late 1990s, the U.S. Navy has built new facilities at the Naval Reactors Facility to store dry naval SNF that has been removed from wet pool storage. Additional details about the storage facilities, stored SNF, and DOE efforts to manage the SNF while it awaits disposal are provided in the Board’s report, *Management and Disposal of U.S. Department of Energy Spent Nuclear Fuel* (NWTRB 2017).

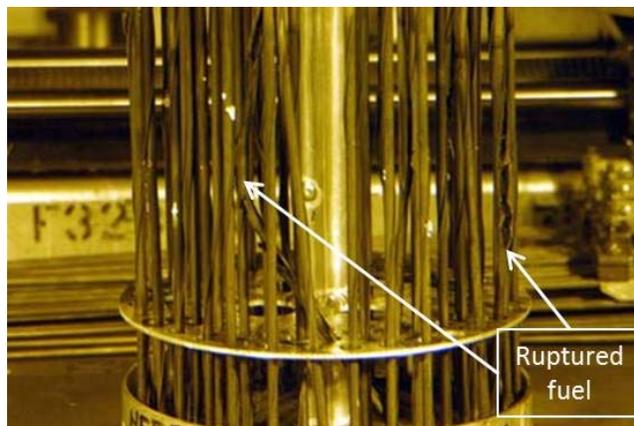

**Figure 3. Sodium-bonded Fuel, including Fuel Ruptured by a Sodium-Water Reaction (DOE 2006).**

### PATH FORWARD FOR MANAGING AND DISPOSING OF INL SNF

The long-term management of SNF at INL is constrained to a large extent by a 1995 agreement between the State of Idaho, DOE, and the U.S. Navy. This “1995 Settlement Agreement” (Idaho *et al.* 1995) and an addendum signed in 2008 specify, among other things, that “DOE shall complete the transfer of all spent fuel from wet storage facilities at Idaho National Engineering Laboratory by December 31, 2023,” and that “DOE shall remove all SNF, including naval spent fuel and Three Mile Island spent fuel from Idaho by January 1, 2035” (no more than 9 MTHM of naval SNF may be kept at INL after January 1, 2035).

The diversity of SNF types and characteristics (*e.g.*, size, shape, and composition) at INL has and will continue to require a diversity of treatment and packaging steps to prepare the SNF for offsite transport and disposal. In 1997, DOE began designing a multi-purpose container, known as the DOE standardized canister. DOE planned to load SNF assemblies into DOE standardized canisters for transportation offsite and disposal in a deep geologic repository (DOE 1999). DOE stopped developing the DOE standardized canister in 2010.

Consistent with the need for SNF packaging, DOE also conducted early planning for a new facility at INL—the Idaho Spent Fuel Facility—with the capability to characterize, condition,<sup>3</sup> and package SNF in DOE standardized canisters; to provide interim storage for packaged SNF;

<sup>3</sup> DOE defines “conditioning” as any process that prepares or treats SNF or HLW for transportation or disposal in accordance with regulatory requirements.

and enable shipment offsite by January 1, 2035 (DOE 2007). However, as of July 2017, DOE has not completed work to develop the Idaho Spent Fuel Facility or the DOE standardized canister.

## REFERENCES

Carmack, J., and L. Braase. 2015. “Current Applications of Three Mile Island-2 Core and Debris Handling at the Idaho National Laboratory.” TopFuel 2015. Zurich, Switzerland. September 13–17.

DOE (Department of Energy). 1999. *Preliminary Design Specification for Department of Energy Standardized Spent Nuclear Fuel Canisters: Volume II – Rationale*. DOE/SNF/REP-011, Rev. 3. Washington, D.C.: U.S. Department of Energy. August.

DOE. 2006. *Preferred Disposition Plan for Sodium-Bonded Spent Nuclear Fuel: A Report to Congress*. Washington, D.C.: U.S. Department of Energy. March.

DOE. 2007. *Mission Need Statement: Idaho Spent Fuel Facility Project*. DOE/ID-11344. Washington, D.C.: U.S. Department of Energy. September.

Hill, T.J. and D.L. Fillmore. 2005. *Managing Spent Nuclear Fuel at the Idaho National Laboratory*. INL/CON-06-11165. Idaho Falls, ID: Idaho National Laboratory. September.

Idaho, DOE, and Department of the Navy. 1995. *1995 Settlement Agreement*. Accessed October 24, 2017. [https://www.deq.idaho.gov/media/550338-1995\\_Settlement\\_Agreement.pdf](https://www.deq.idaho.gov/media/550338-1995_Settlement_Agreement.pdf).

INL (Idaho National Laboratory). 2012. *Three Mile Island Core Debris Packaging, Transportation, and Storage Summary*. INL/-LTD-11-22779. Idaho Falls, ID: Idaho National Laboratory. February.

INL. 2017. “INL Desert Facilities.” Accessed October 24, 2017. <https://www.flickr.com/photos/inl/3466173400>.

NRC (Nuclear Regulatory Commission). 1999. “Department Of Energy, Idaho Operations Office Notice of Issuance of Materials License SNM–2508 for TMI–2 Independent Spent Fuel Storage Installation.” *Federal Register*, 64, 14946, March 29.

NWTRB (Nuclear Waste Technical Review Board). 2017. *Management and Disposal of U.S. Department of Energy Spent Nuclear Fuel*. Arlington, VA: U.S. Nuclear Waste Technical Review Board. December.

### **The U.S. Nuclear Waste Technical Review Board**

is an independent federal agency established in the 1987 Nuclear Waste Policy Amendments Act.

The Board evaluates the technical and scientific validity of U.S. Department of Energy activities related to implementing the Nuclear Waste Policy Act. The Board also provides objective expert advice on nuclear waste management and disposal issues to Congress and the Secretary of Energy.

The Board’s eleven members are nominated by the National Academy of Sciences and are appointed by the President.